


## VRLA Rechargeable Battery

# BPS12-12

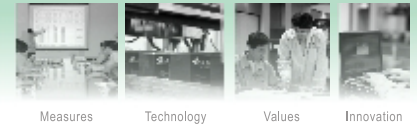

Measures

Technology

Values

Innovation

### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Absorbent Glass Mat technology for efficient gas recombination.
- Service Life — 12 Years.  
According to Eurobat (20 °C) — Very Long Life


### APPLICATIONS

- UPS
- Fishing Lights
- Toy-Cars
- Power Packs
- Laboratory Equipment



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	12.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	3940g(8.69lbs.)
Terminals	T2 (Faston Tab 250) T1 is optional
Internal Resistance	≤ 18mΩ (Fully Charged )
Max. Discharge Current	180 A (5 sec.)
Max. Charge Current	3.6 A
Operating Temperature Range	Charge: 0°C~40°C(32°F~104°F) Discharge: -20°C~50°C(-4°F~122°F) Storage.: -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS( UL94 HB) BPS12-12 Optional: Flame Retardant ABS(UL94 V-0) BPS12-12FR

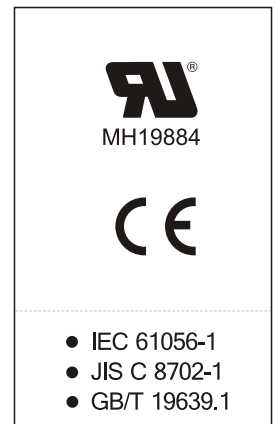

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

#### Length

151±1.5 (5.94±0.06)

#### Width


98±1.5 (3.86±0.06)

#### Container Height


94±1.5 (3.70±0.06)

#### Total Height


98±2.0 (3.86±0.08)

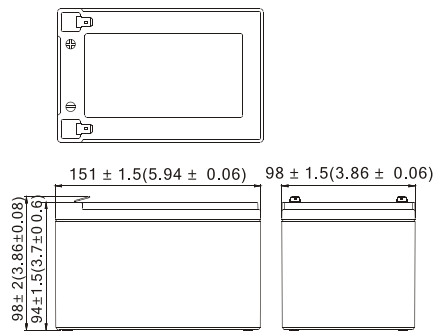

#### Terminal T1



#### Terminal T2



### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	433.9	319.4	256.0	152.3	87.3	35.0	24.1	13.48	7.09
1.75V	502.2	346.0	267.7	158.1	90.0	35.7	24.5	13.68	7.20
1.70V	533.6	358.5	276.0	161.7	91.6	36.0	24.6	13.75	7.24
1.65V	557.5	367.1	282.4	164.0	92.7	36.3	24.7	13.79	7.26
1.60V	576.0	374.4	288.0	165.6	93.6	36.5	24.8	13.79	7.26

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	39.09	28.12	22.26	12.91	7.34	2.91	2.01	1.123	0.591
1.75V	46.07	30.46	23.28	13.40	7.56	2.97	2.04	1.140	0.600
1.70V	48.95	31.55	24.00	13.70	7.70	3.00	2.05	1.146	0.603
1.65V	51.15	32.31	24.55	13.89	7.79	3.02	2.06	1.149	0.605
1.60V	52.84	32.96	25.04	14.03	7.87	3.04	2.06	1.149	0.605

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.